

COMMON LED FLEXIBLE STRIP

FLEX 60LED/M 3528




KEY FEATURES:

- Adopted with 3528 sized LEDs, with wide application.
- 60 LEDs per meter.

TECHNICAL DATA:

Item No.	LED Color	Input Voltage	Watt/M	Lumen/M	Lumen/Watt	CRI	LED/M	Width	Cuttable Length	IP Rating	EEL
FL12V-60-5M-3528WWS	WWS 2700K	12V DC	4.8w	430lm	90LM/W	80+,90+	60	8mm	50mm	IP20/IP44/IP65/IP-NANO/IP67/IP68	A+
FL12V-60-5M-3528WW	WW 3000K	12V DC	4.8w	430lm	90LM/W	80+,90+	60	8mm	50mm	IP20/IP44/IP65/IP-NANO/IP67/IP68	A+
FL12V-60-5M-3528NW	NW 4000K	12V DC	4.8w	460lm	95LM/W	80+,90+	60	8mm	50mm	IP20/IP44/IP65/IP-NANO/IP67/IP68	A++
FL12V-60-5M-3528CW	CW 6000K	12V DC	4.8w	460lm	95LM/W	80+,90+	60	8mm	50mm	IP20/IP44/IP65/IP-NANO/IP67/IP68	A++
FL24V-60-5M-3528WWS	WWS 2700K	24V DC	4.8w	430lm	90LM/W	80+,90+	60	8mm	100mm	IP20/IP44/IP65/IP-NANO/IP67/IP68	A+
FL24V-60-5M-3528WW	WW 3000K	24V DC	4.8w	430lm	90LM/W	80+,90+	60	8mm	100mm	IP20/IP44/IP65/IP-NANO/IP67/IP68	A+
FL24V-60-5M-3528NW	NW 4000K	24V DC	4.8w	460lm	95LM/W	80+,90+	60	8mm	100mm	IP20/IP44/IP65/IP-NANO/IP67/IP68	A++
FL24V-60-5M-3528CW	CW 6000K	24V DC	4.8w	460lm	95LM/W	80+,90+	60	8mm	100mm	IP20/IP44/IP65/IP-NANO/IP67/IP68	A++

FL12V-60-5M-3528xx

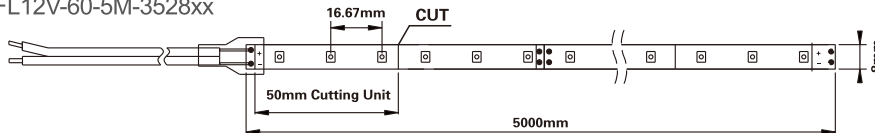

FL24V-60-5M-3528xx

